

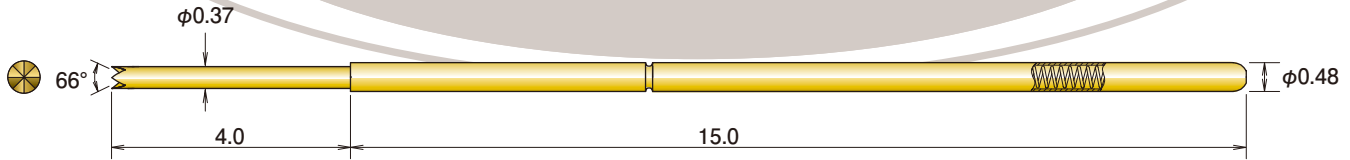



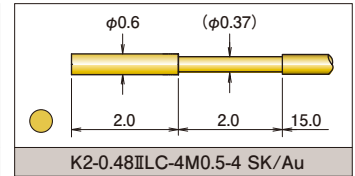



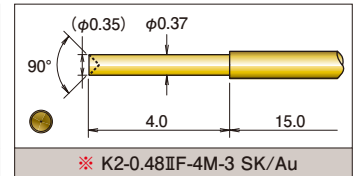



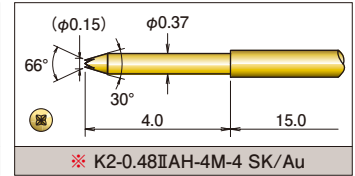



For 1.0 mm pitch K2-0.48II series

(単位:mm)




推奨ストローク	荷重	MAXストローク	スプリング耐久回数	初期荷重	固有抵抗 (typ.)	最大許容電流 (typ.)	使用温度
1.33mm	50gf	2.0mm	100万回	26gf	100mΩ	0.8A	-45~125℃




※印は、MAXストローク2.3mm


リセプタクル Receptacle

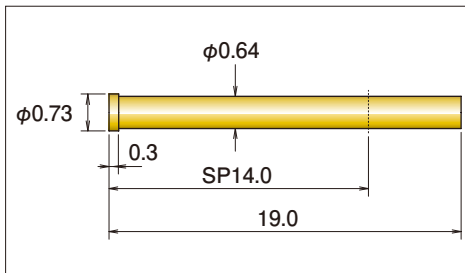

K2-0.48S-2-SP14-2
(S048-140-03)

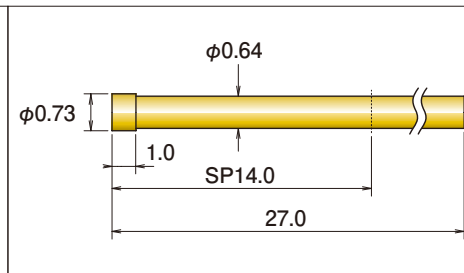

K2-0.48S-3-2
(S048-140-04)

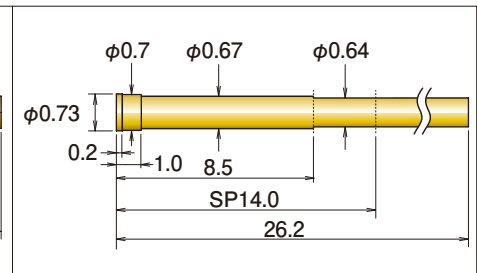

K2-0.48S-4-26.2L-2
(S048-140-05)