

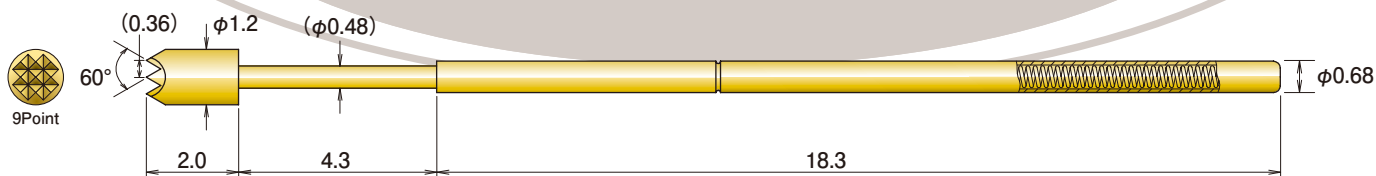
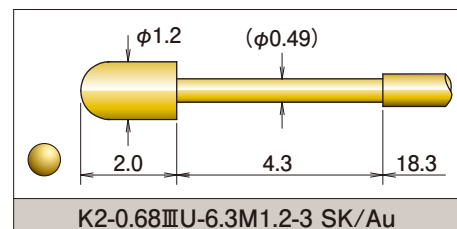
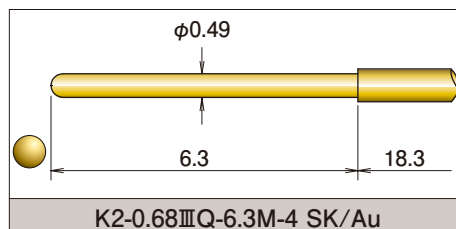
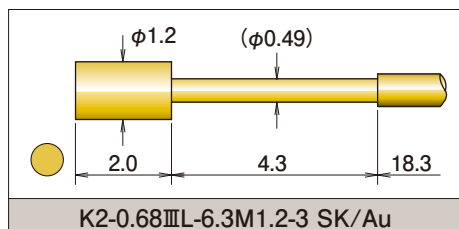
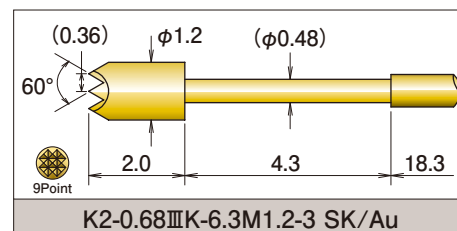
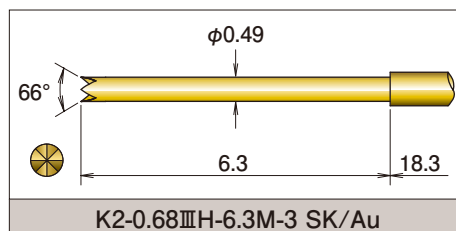
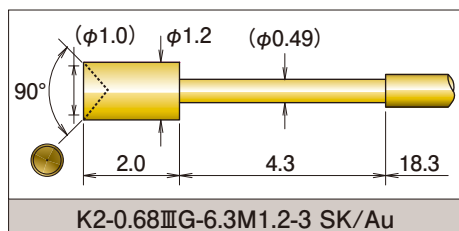
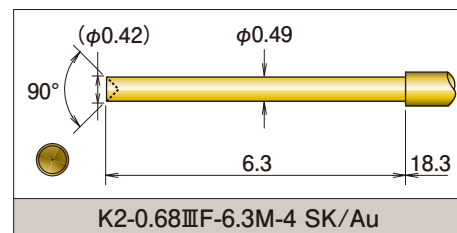


For 1.27 mm pitch K2-0.68Ⅲ series


(単位:mm)

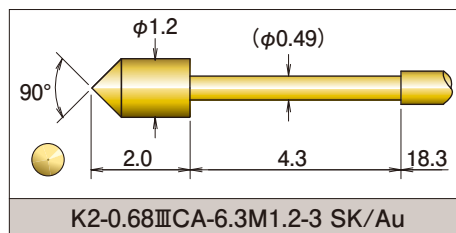


推奨ストローク	荷重	MAXストローク	スプリング耐久回数	初期荷重	固有抵抗 (typ.)	最大許容電流 (typ.)	使用温度
2.87mm	80gf	4.3mm	10万回	27gf	60mΩ	1.0A	-45~125℃

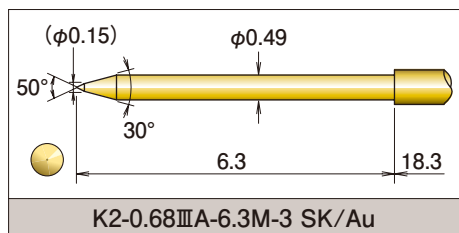

リセプタクル Receptacle

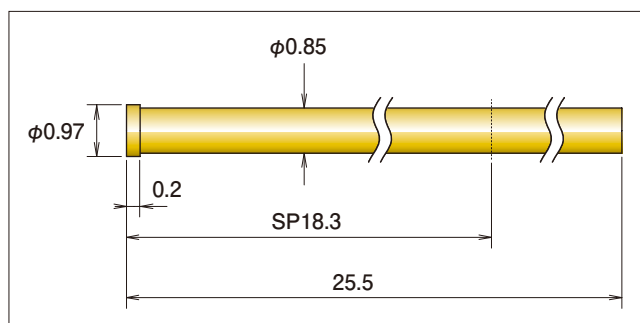

K2-0.68S-SP18.3-25.5L-1
(S068-183-02)

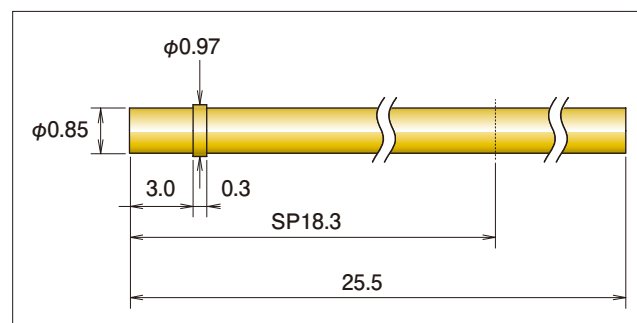

K2-0.68S-SP18.3-25.5L-2
(S068-183-03)