



# K2-0.26II Series for 0.5mm [20mil] Pitch

## K2-0.26II Series Plunger Tip Styles


Pin Length: 14.5mm [0.571inch.]

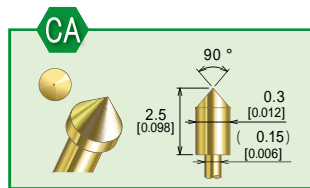


K2-0.26 III CA-4.5M0.3-8

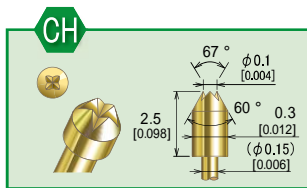


K2-0.26 III CH-4.5M0.3-4

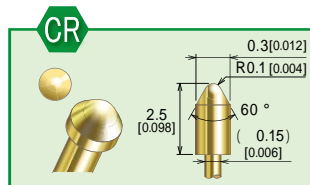


K2-0.26 III CR-4.5M0.3-3

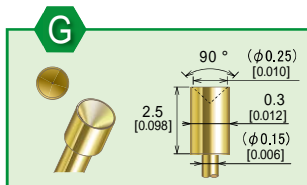

K2-0.26 III G-4.5M0.3-1

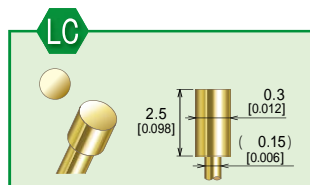


K2-0.26 III LC-4.5M0.3-1

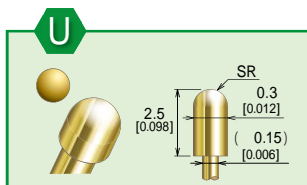


K2-0.26 III U-4.5M0.3-1

## K2-0.26II Series Plunger Tip Styles


Pin Length: 12.0mm [0.472inch.]

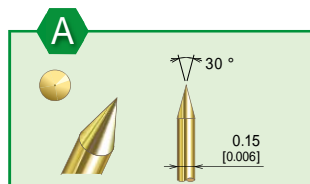

K2-0.26 III A-2M-5

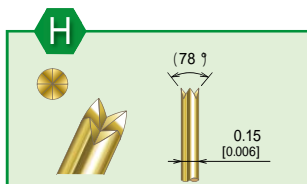



K2-0.26 III H-2M-1

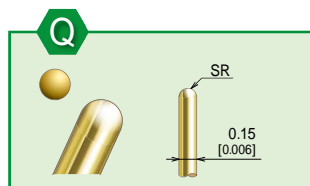

K2-0.26 III Q-2M-5

## スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.32mm [0.052 inch]
荷重 Spring Force at Operating Travel	16gf [0.56oz.]
初期荷重 Initial Force	3gf [0.11oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	20万回 (200K Cycles)
抵抗値 Resistance (Typ.)	250m
最大許容電流値 Current Rating (Typ.)	Pin Length: 14.5mm 1.5A
	Pin Length: 12.0mm 1.7A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

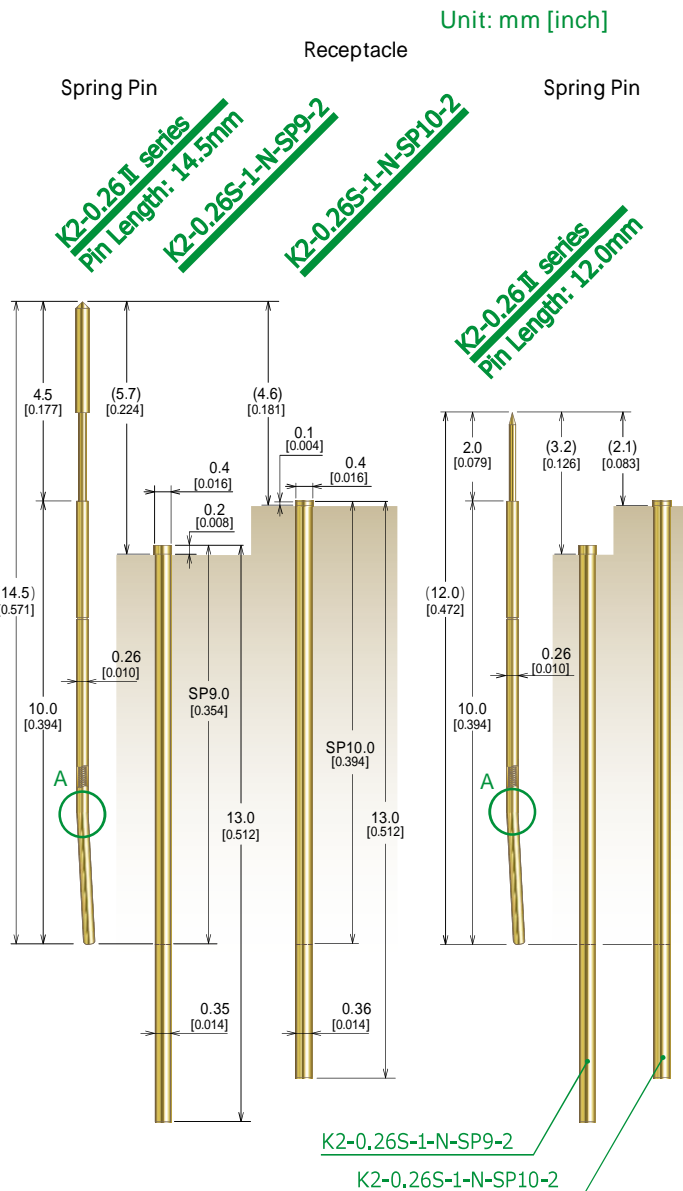

抜け止め用曲げ加工付  
Bending for retention

## リセプタクル品名 Receptacle

K2 0.26S 1 N SP9 2  
(末端加工無し / No Termination)



K2 0.26S 1 N SP10 2  
(末端加工無し / No Termination)



## リセプタクル仕様 Receptacle Specifications

Material/Finish Phosphor Bronze / Au

\*All specifications are subject to change without notice.