



K2-0.31 II Series for 0.7mm [28mil] Pitch

K2 0.31 Series Plunger Tip Styles


Pin Length: 14.5mm [0.571inch.]




K2-0.31 III CA-4.5M0.34-9



K2-0.31 III CH-4.5M0.34-7




K2-0.31 III G-4.5M0.34-5




K2-0.31 III U-4.5M0.34-3

K2-0.31 II Series Plunger Tip Styles


Pin Length: 12.0mm [0.472inch.]




K2-0.31 III A-2M-11




K2-0.31 III AH-2M-4



K2-0.31 III F-2M-3



K2-0.31 III H-2M-11





K2-0.31 III Q-2M-5

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	25gf [0.88oz.]
初期荷重 Initial Force	5gf [0.18oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	20万回 (200K Cycles)
抵抗値 Resistance (Typ.)	180m
最大許容電流値 Current Rating (Typ.)	Pin Length: 14.5mm 2.3A
	Pin Length: 12.0mm 1.9A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Au Clad
Spring	Music Wire / Au

Unit: mm [inch]

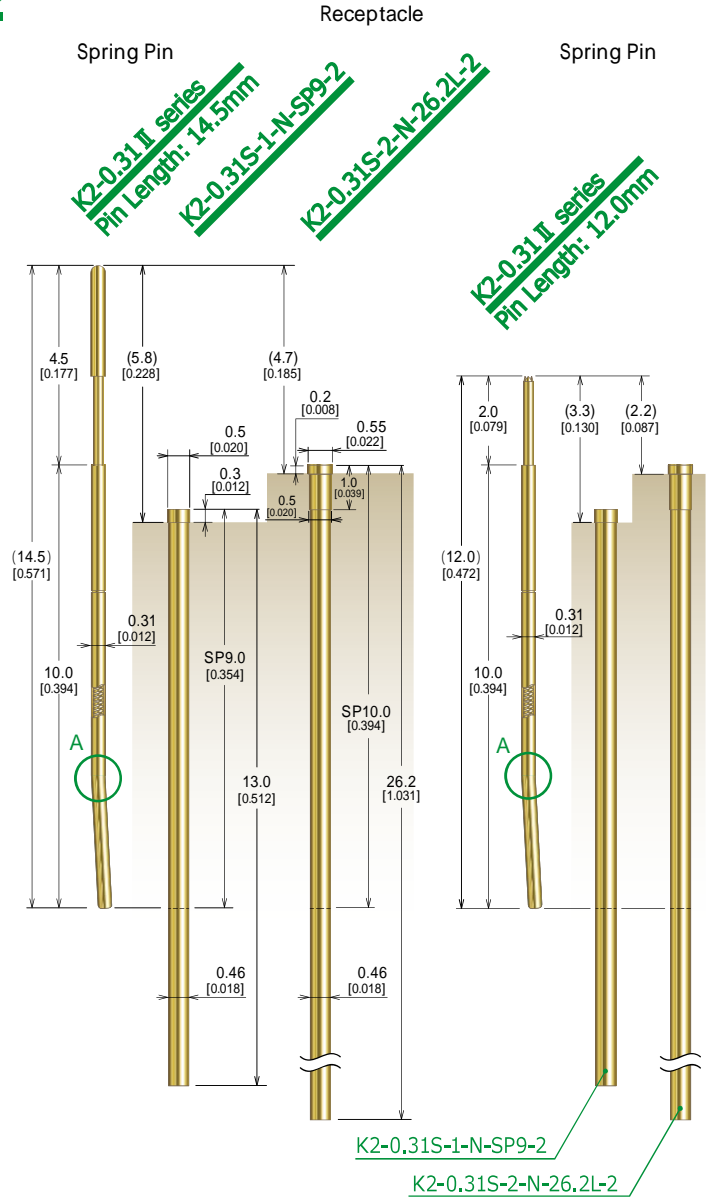

抜け止め用曲げ加工付
Bending for retention

リセプタクル品名 Receptacle

K2 0.31S 1 N SP9 2
(末端加工無し / No Termination)



K2 0.31S 2 N 26.2L 2
(末端加工無し / No Termination)



リセプタクル仕様 Receptacle Specifications

Material/Finish Phosphor Bronze / Au

*All specifications are subject to change without notice.