


K2-1.37II Series for 2.54mm [100mil] Pitch


K2 1.37 Series Plunger Tip Styles

Pin Length: 24.5mm [0.965inch.]


Unit: mm [inch]




K2-1.37 III A-6M-3




K2-1.37 III C-6M1.5-3




K2-1.37 III CR-6M1.4-4




K2-1.37 III G-6M1.9-5




K2-1.37 III H-6M-1



K2-1.37 III K-6M1.5-3




K2-1.37 III Q-6M-5



K2-1.37 III U-6M1.9-3

Spring Pin

Receptacle

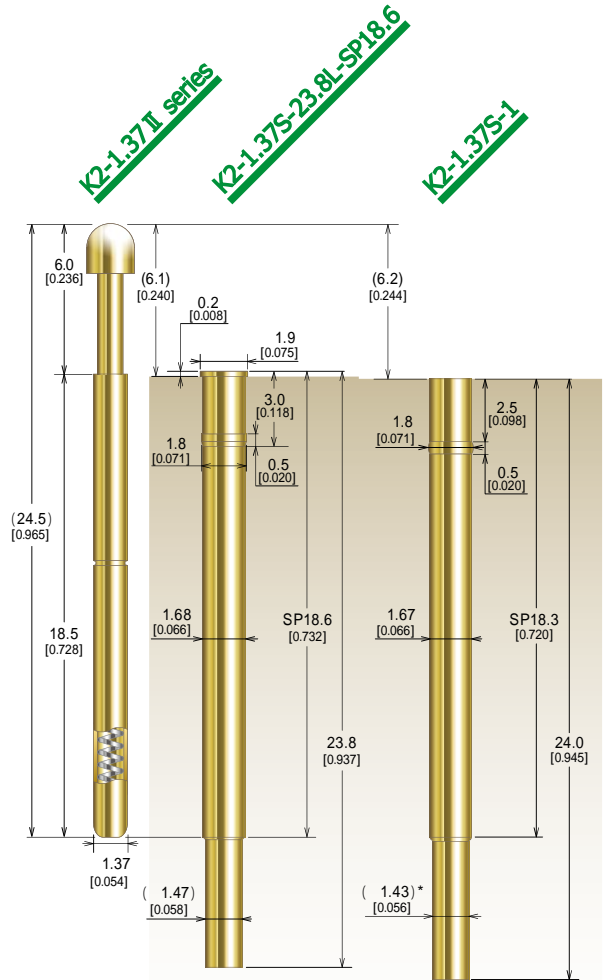

リセプタクル 品名 Receptacle

K2 1.37S 23.8L SP18.6
(末端加工無し / No Termination)



K2 1.37S 23.8L SP18.6 U
(ソルダーカップ付 / with Solder Cup)



K2 1.37S 1
(末端加工無し / No Termination)



K2 1.37S 1 U
(ソルダーカップ付 / with Solder Cup)



スプリングピン仕様 Spring Pin Specifications

| | |
|-----------------------------------------|------------------------|
| 推奨ストローク Operating Travel | 2.67mm [0.105 inch] |
| 荷重 Spring Force at Operating Travel | 110gf [3.88oz.] |
| 初期荷重 Initial Force | 39gf [1.38oz.] |
| 最大ストローク Max Travel | 4.0mm [0.157 inch] |
| スプリング耐久回数 Life Span at Operating Travel | 100万回 (1,000K Cycles) |
| 抵抗値 Resistance (Typ.) | 35m |
| 最大許容電流値 Current Rating (Typ.) | 7.6A |
| 使用温度 Operating Temp. | 45 140 |
| Material/Finish | |
| Plunger | BeCu / Au |
| Barrel | Nickel Silver / Au |
| Spring | Stainless Steel / |

リセプタクル仕様 Receptacle Specifications

| | |
|-------------------------------------------------|----------------------|
| K2 1.37S 23.8L SP18.6 / K2 1.37S 23.8L SP18.6 U | |
| Material/Finish | Brass / Au |
| K2 1.37S 1 / K2 1.37S 1 U | |
| Material/Finish | Phosphor Bronze / Au |

*All specifications are subject to change without notice.